


TYPICAL PATIO, POOL, & SHED SLAB

2010 FBC Residential R4404.4.3 - Concrete floor slabs placed directly on the supporting soil shall be a minimum of 4 inches in thickness, reinforced with not less than 0.028 square inches of reinforcing per linear foot of slab in each direction (wire mesh).

2010 FBC Residential R4404.4.3.5 - The discontinuous edges of all slabs surrounding swimming pools and floor slabs for screen patios and utility sheds shall be at least a minimum of 8 inches (203 mm) deep and 8 inches (203 mm) wide and shall be reinforced with one continuous #5 bar.

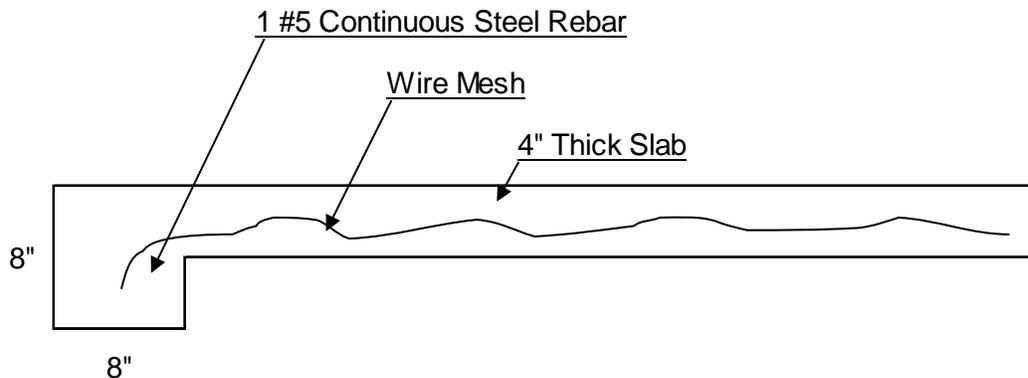

"Committed to Excellence... Always."